
User Manual

HSN2MPPDL10 4k WiFi Body Camera



Product Structure

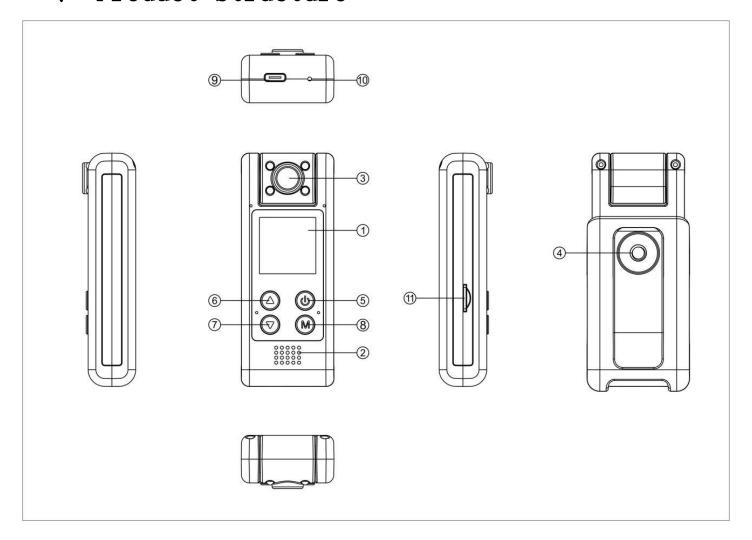

- 1) Screen
- 2) Horn
- 3) Len

4) Clip

- 5) Power 6) Up

7) Down

- 8) Menu 9) TYPE-C Port
- 10) Reset
- 11) TF Card Port

二、Button Description

1. Power

- 1) Long press to turn on/off the recorder;
- 2) Short press to start/stop recording;
- 3) Confirm function in Menu and Playback mode;

2. Menu

- 1) Short press to enter/exit Menu;
- 2) Long press to Playback mode.

3. Up

- 1) Upward selection key;
- 2) Short press to photo and screenshot in Video mode;

4. Down

- 1) Downward selection key;
- 2) Long press to turn ON/OFF WiFi;
- 3) Long press to turn on the infrared white light in Video/Photo mode;

5. Reset

When the machine has a splash screen, abnormal dead, etc., please use needle pin and insert to the hole to reset it.

Note: In the video/photo/record/playback mode of work, it is prohibited to unplug the card!

6. TYPE-C Port

- 1) Interface type: Type-C;
- 2) Charge the recorder;
- 3) Used to connect to the computer for "memory/PC camera/video mode" operation.

三、Operating Instructions

1. USB Mode

Memory: Access to view video or photo files in this mode;

Video mode: Only to charge the recorder.

2. Playback Mode

- 1) Short press Up/Down to switch videos;
- 2) Short press Power button to stop/continue playing videos.
- 3) Short press Menu to exit playback Mode.

四、Product Parameters and Specifications

Machine Type	L10
Lens	Rotatable lens, 180 degrees
TFT Display	Color Display(240*240)
Video Resolution	3840*2160、2560*1440、1920x1080P
Video File Format	MP4
Image Quality	3M、5M、8M、10、12、16、24、34、40、48、
	52
Photo Format	JPG
Loop Video	Off, 5/10/15/20 minutes
Exposure Compensation	2、1、0、-1、-2
IR Switch	Auto, Manual
Auto Power Off	Off, 1 minute, 3 minutes
AC Frequency	50Hz、60Hz
Auto Screen Off	Off, 3 minutes, 5 minutes, 10 minutes
Volume	Off, Low, Medium, High
Recording File Format	WAV
Reset System	Confirmation, Cancellation
Formatting	Confirmation, Cancellation

Working Humidity	30%
Operating Temperature	-25°/+75°
Power Supply	USB voltage 5V, current ≥ 1A battery 3.7V (battery
	soldering is not removable)
Standby Current	Shutdown≤5.61MA
Low Power Alert	3.53V
Power Consumption	BAT 3.7V/≤ 233mA /≤0.86W
	USB5V/≤ 549mA(Open IR + Video)/≤2.74W
Memory Card	TF card, supports up to 256G
Language	English, Simplified Chinese, Traditional Chinese,
	Japanese, Korean, Russian, French, German,
	Czech, Portuguese, Polish, Dutch, Turkish, Thai

Note: This product reserves the right to change design and specifications without notice.